

**Ek****EKSELANS BY ITS**

# MIXER/ DEMIXER RETURN PATH

**MI RP · MI RP IEC**


√ Mezclador / Desmezclador de canal de retorno

√ **EKOAX** compatible


**MI RP****MI RP IEC**

## INSTALLATION SCHEME

*Installation with line amplifier without return path*

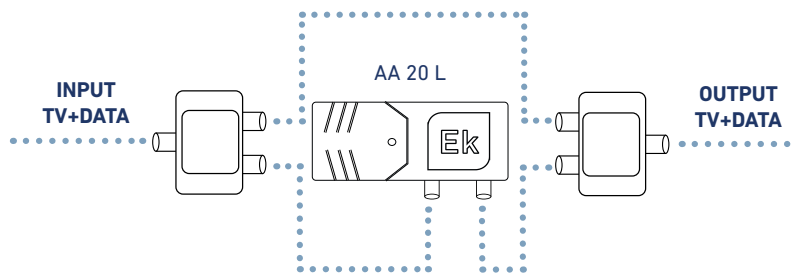

*Installation of MI RP IEC mix-demix in a wall-socket*

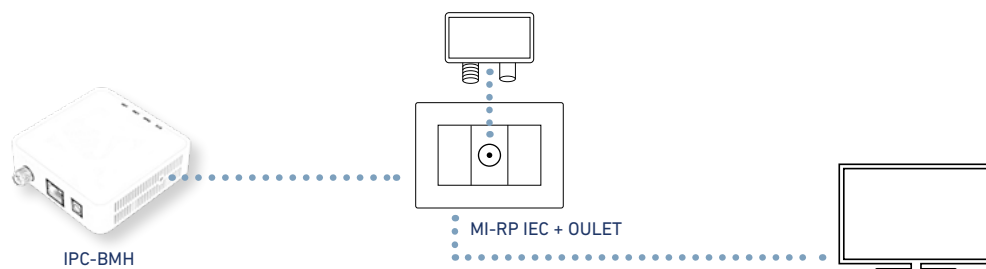



## TECHNICAL INFORMATION

REFERENCE		MI RP		MI RP IEC	
Code		132001		132002	
Inputs		DATA	TV	DATA	TV
Input connector		F	F	F	IEC male
Frequency range		5-65	85-2150	5-65	85-1000
Insertion loss	dB	<1	<1,5	<0,5	<1
Rejection	dB	>30	>25	>40	>32
Outputs	N°	1= DATA + TV		1= DATA + TV	
Output connectors		F		IEC female	
DC Pass		NO	YES	NO	YES