

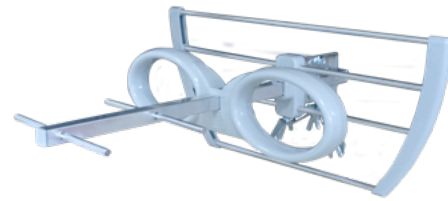
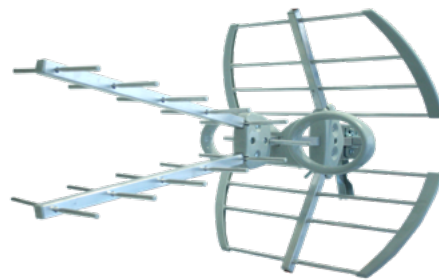
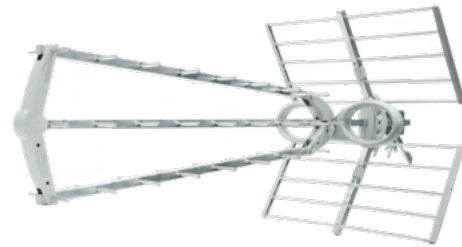
Ek**EKSELANS BY ITS**

UHF OUTDOOR ANTENNAS

**EK MINI L2 · EK 70 L2 · EK 100 L2
DAP 22**

Lte2**easyU**

- ✓ Waterproof compact dipole with F connector
- ✓ LTE 2 694 MHz Filter
- ✓ Special wing nuts
- ✓ 100% closed elements.
- ✓ Elevation adjustment
- ✓ easyU flange
- ✓ quick assembly

**EK MINI L2****EK 70 L2****EK 100 L2**

**DIPOLO
ACTIVO/
PASIVO
OPCIONAL**

DAP 22

Access the [video](#) and discover the advantages of easyU

*Dipole**EasyU Flange Wing Nuts**Easy assembly*



TECHNICAL TABLE

REFERENCE		EK MINI L2	EK 70 L2	EK 100 L2
Code		013012	013015	013014
Channels		21-48	21-48	21-48
Frequency Range	MHz	470-694	470-694	470-694
Gain	dBi	12	14,5	17,5
Length	mm	455	745	1070
Front-to-back ratio	dB	14	15	20
Horizontal beamwidth (-3dB)	°	42	38	33
Polarisation	dB	H/V		
Wind load	N (130 Km/h)	20	35	110
Packaging	uds.	6	6	6

REFERENCE		DAP 22
Code		013031
Gain active mode	dB	+22dB
Gain pasive mode		-1dB
Output level	dBuV	104
Power supply	Vdc	12 a 24
Consumption	mA	30